

SIDE FOLDING GRILLES



www.keypenk.com



ESG-30
VISIONGLIDE™



ESG-30 VISIONGLIDE™


An effective traffic barrier that allows high visibility, while maintaining a sense of open space. The most economical and lightweight open style sliding grille, it easily blends with any decor, providing unobtrusive protection. Excellent for floor to ceiling dividers in public spaces such as offices, hospitals, food courts and lobbies.

With a hang weight of 5.9 kg/ sq.m., VisionGlide is an ideal solution to install on limited supporting structures.

The curtain is formed with a series of vertical 8mm diameter aluminum rods on 89 mm centers. Horizontal chains formed of eyeletted aluminum links are spaced at 305 mm apart. Vertical hanger rods mounted to rollers that slide in the overhead track support the curtain.

FEATURES

- Clear anodized rods, links and post material
- PVC Tube Spacers, Polycarbonate Hinged Top and Bottom Panels to match
- Fully Anodized Version Optional
- Maximum Height: 366 cm
- Standard Anodized Color
- 305 mm Link Spacing Standard
- 229 mm, 152 mm or 76 mm Spacing Optional
- Hook bolt locking with cylinders both sides standard
- 90° and 135° curves standard, others optional.

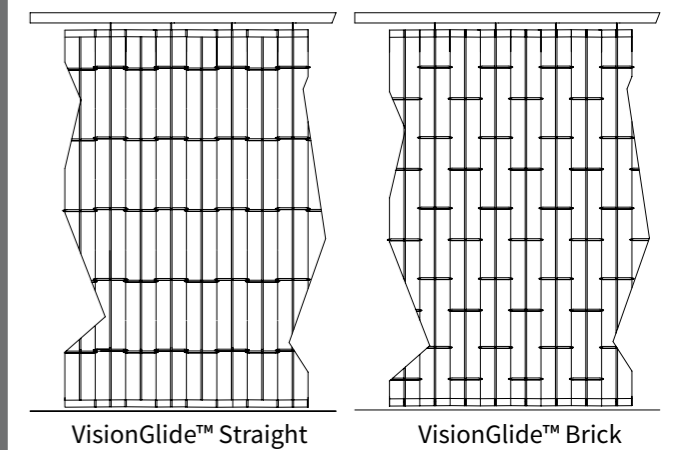

VisionGlide™ Straight

VisionGlide™ Brick



ESG-32
GLIDEGARD™




ESG-32 GLIDEGARD™

Heavy duty construction provides a higher level of security while keeping the sense of open space. Individual panels interlock by full height hinge members. Fully concealed hinge rods protect from vandalism and damage. The panels fold cleanly and positively, resulting in a smooth and easy to operate Grille. The open concept of the door doubles in decreasing the overall door weight and increasing operation ease. Recommended for use behind storefront glass and where high strength with ventilation is required. The Glide Guard is a great choice for enclosing spaces that require good cross ventilation such as food court concessions. The Glide Guard is an appropriate area divider where strength and high visibility are needed; great for schools, sports complexes and public transit areas.

FEATURES

- Clear Anodized Rods, Links, Post Material and Hinged Top and Bottom Panels.
- PVC Tube Spacers to Match
- 305 mm Link Spacing Standard
- 229 mm, 152 mm or 76 mm Spacing Optional
- Maximum Height: 427 cm
- Color Anodizing Optional
- Standard Colors: White, Black, Bronze
- Hook bolt locking with cylinders both sides standard
- Emergency Egress Option - 90 x 210 cm egress door within the curtain 90° and 135° curves standard

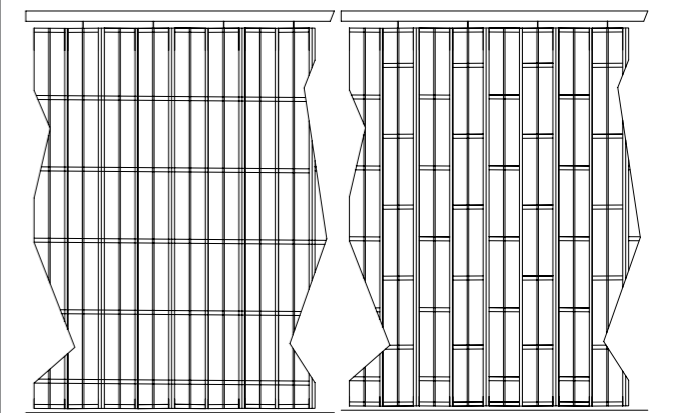

GlideGuard™ Straight

GlideGuard™ Brick



ESC-31
VISTAPANE™

VISTAPANE™ STANDARD FEATURES


- Clear Anodized Truss Panels and Posts
- Color Anodizing Optional
- Standard Colors: White, Black, Bronze
- Hook bolt locking with cylinders both sides standard
- Emergency Egress Option- 90 x 210 cm egress door within the curtain
- 90° and 135° curves standard




ESC-31 VISTAPANE™

SLOTTED AND PERFORATED PANELS:

Perforated with a pattern of slots that provides high level security with visual access and air flow. Interlocking components prevent forced entry. Lighter than glass inserts; requiring less bulkhead support and easy to operate. Excellent for storefront applications.

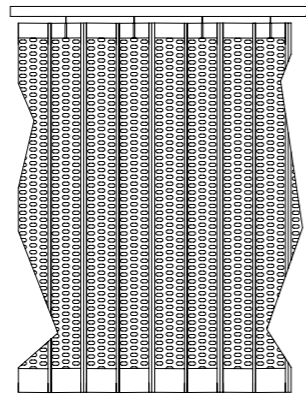

VistaPane™ Slotted

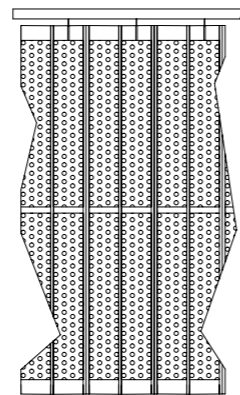

VistaPane™ Perforated

FEATURES

VistaPane™ Slotted

- 1.8 mm Fully Anodized Slotted Aluminum Panels
- 3 cm oblong slots
- Extruded insert fits into framing hinge extrusion for superior security
- Maximum Height: 610 cm
- Airflow Through Closure: 20%
- Airflow Through Panel: 30%

VistaPane™ Perforated

- 1.2 mm Perforated Steel Panels
- Maximum Height: 427 cm
- Airflow Through Closure: 39%
- Airflow Through Panel: 47%



ESC-31 VISTAPANE™

GLASS / LEXAN AND SOLID PANELS:

Clear, shatterproof Lexan® or tempered glass inserts allow unobstructed views while providing solid security against theft and intrusion and blocking refuse odor and smoke. Tempered glass not only protects areas from direct intruder blows but, keeps all arms and objects out of the store property.

Solid panels provide maximum-security protection along with absolute visual privacy. Full height aluminum panels and heavy gauge dedicated extrusions deny visual access and provide solid security against theft and vandalism as well as prying eyes. Suitable for a myriad of applications where restricted airflow is required and some acoustic separation is desired.

FEATURES

VistaPane™ Glass


- 1.2 mm Perforated Steel Panels
- Maximum Height: 427 cm
- Airflow Through Closure: 39%
- Airflow Through Panel: 47%

VistaPane™ Lexan

- Aluminum frames filled with 3.2 mm Thick Lexan Panels
- Maximum Height: 427 cm

VistaPane™ Solid

- 1.8mm Clear Anodized Solid Aluminum Panels
- Maximum Height: 610 cm

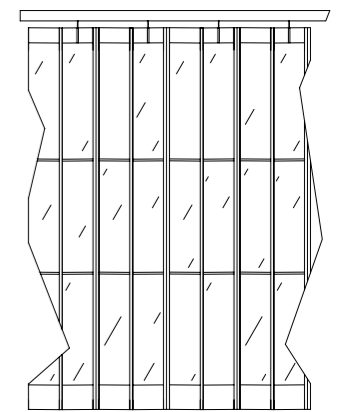

VistaPane™ Lexan or VistaPane™ Glass



**Keypenk Otomatik Kapı ve
Kepenk Sistemleri Metal Plastik
San. ve Tic. A.Ş.**

Bağlar Mah. Yalçın Koreş Cad. No: 6/B
34209 Güneşli – İstanbul - Turkey
Tax Office No: Güneşli 6160014361
Phone +90 216 444 14 35
Email: sales@keypenk.com

  /keypenkofficial

  /keypenk

www.keypenk.com

